



TSB---Door-Lock-Replacement

 Sayali Kothari
Contractor


Machine Door Lock

Date Issued: 4/29/2011

Date Updated: 2/8/2012

Description: This TSB shows the steps to replace the lock of a kiosk.

1. Open the kiosk door to get a full view of the lock assembly.
 - a. Note the "C" clip holding the lock to the door on the inside. (Fig 1-1)
 - b. Note the small button on the neck of the T lock. (Fig 2-1)

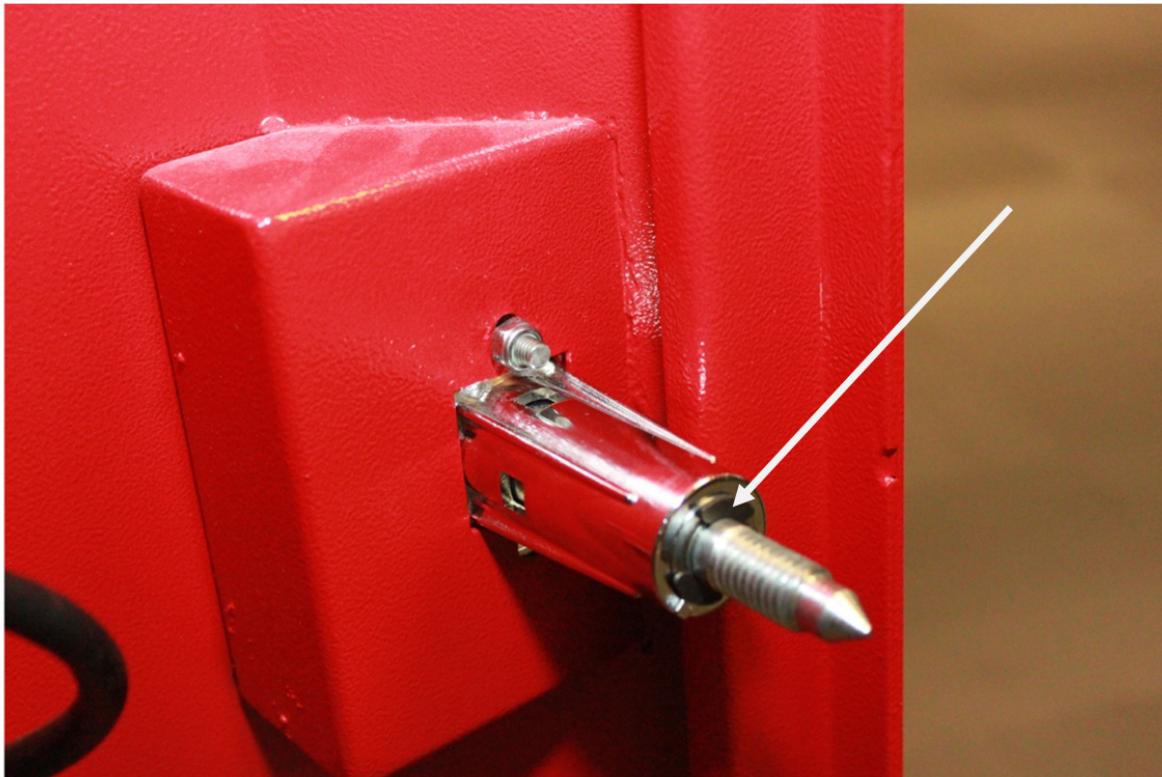

(Fig 1-1)



2. Take a flathead screwdriver and carefully pop the C clip off. (Fig 2-2)

3. With the C clip off, slide the entire lock assembly out of the door.
4. Locate the small button on neck of the lock. Using a screwdriver, press the button into the lock assembly to disengage the lock. (Fig 3-1)

5. Slide the lock cylinder out of the lock assembly. Replace and slide the new lock cylinder back into the assembly until the button clicks back into place. (Fig 3-2)

6. Slide the lock assembly back into the door and reseat the C clip.
7. Close the kiosk door.

Tools/Parts Needed:

Flathead Screwdriver, Replacement Lock

Associated TSB's:

<i>Owner</i>	<i>Department</i>	
Created by: Thanh Nguyen/ Elric Zufan	Machine Support	
Published by: Elric Zufan	Machine Support	
<i>Revision#</i>	<i>Date</i>	<i>Description</i>
1.0.0	4/29/2011	Original release
1.0.1	2/8/2012	Updated formatting

[Report Out-of-Date Content](#)

